


Hydraulic Breaker AI series

Model line-up



Show the best performance at any job site of quarry, mining, general construction and demolition.

Simple & Powerful

Simple box design bracket with Anti-abrasion plate

■ Bigger size of power components




SPECIFICATIO	N	AI-40	AI-65	AI-80	AI-150	AI-200	AI-450	AI-550
Working pressure	MPa	9-12	11-14	12-15	15-17	16-18	16-18	16-18
Oil flow consumption	L/min	23-70	30-65	35-75	65-100	97-139	200-260 2	210-290
F requency	B.P.M 6	500-1000 !	500-900 40	00-800	350-700	350-500	250-400	200-350
Operating weight	kg	192	342	436	894	1840	3100	3661
Overall length	mm	1363	1558	1850	2235	2849	3337	3617
Working tool dia.	mm	53	68	75	100	140	165	175
Carrier machine weight r	angen	2.5-4	4-6.5	6-9	10-15	18-26	30-45	40-55
Carrier machine flow range L/min		30-70	35-70	10-110	80-140	120-180	220-315	280-360

CIOKADA

Simple & Powerful














Hello! It's OKADA AIYON CORPORATION

About Us
















High Quality an



Exhaustive Quality Control

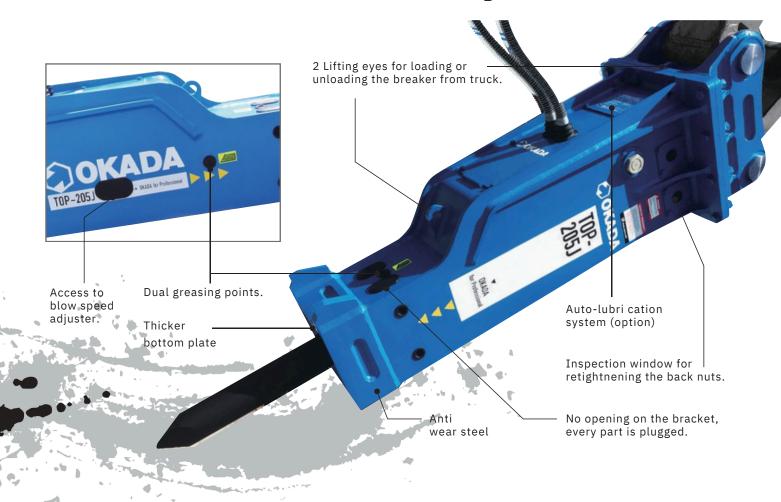

- 1. Anti-Blank Fire system
- 2. Anti-abrasion box style bracket design
- 3. Blow speed control adjuster
- 4. High pressure accumulator
- 5. Auto-lubrification system (option)



SPECIFICATIONS

	Unit	TOP205J	
Working Pressure	MPa	15~18	
Oil flow Consumption	L/min	110~135	
Frequency	b.p.m.	L 360~430	
rrequericy	b.p.m.	H 500~560	
Operating Weight	kg	1780	
Overall Length	mm	2726	
Working Steel Dia.	mm	135	
Carrier Machine Weight Range	ton	18~26	
Carrier Output Flow Range	L/min	140~210	

The speci cations of breaker are subject to change without notice. These numbers may be varied depending on the carrier machine condition and material.